



Technical information

Table of distances with VPSW201 power supply included

| Wire cross-section | La+Lb | Lc |
|--|-------|------|
| 0,5 mm ² | 30 m | |
| 1 mm ² (VCM/1D) | 100 m | 25 m |
| 1 mm ² (symmetrical pair cable) | 80 m | 25 m |

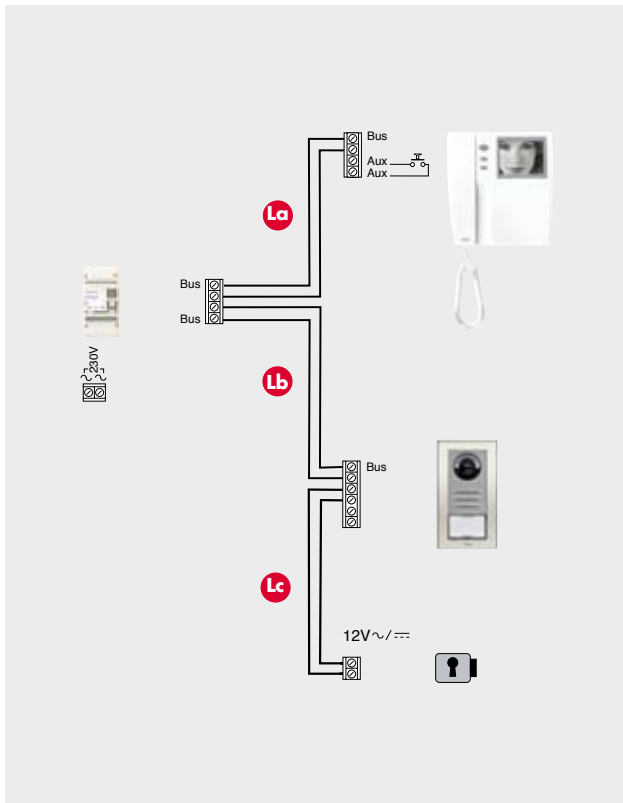

Product dimensions

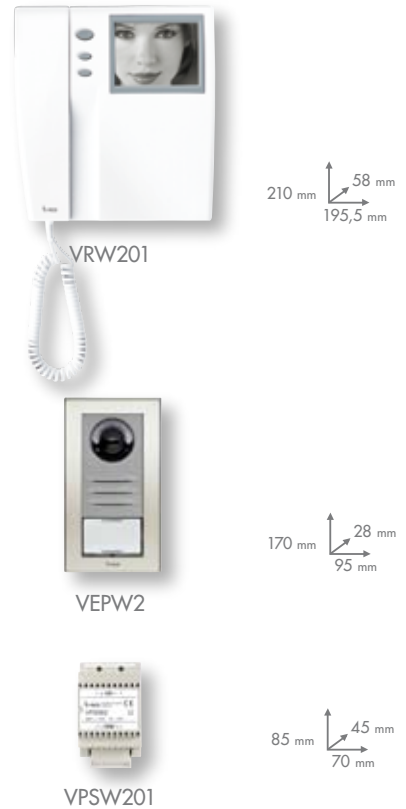

Video kit

| | | | |
|---|---|---|--|
|  |  | COD. 62623300 ART. BRED VIDEOKIT PLUS VKW201 | Expandable video kit composed of: 1 Video entry control 1 Entry panel 1 Power supply |
|  |  | COD. 62117400 ART. BRED VIDEO ENTRY CONTROL VRW201 | Video entry control b/w |

Video KIT *plus*



▶ Vkw201

Video entry system



Video KIT *plus*

▶▶ cod. 62623300

Video KIT plus is the new expandable not polarized 2-wire video entry kit for one-way and two ways systems.







The KIT includes one entry panel, one video entry module, and one power supplier.

It can be expanded up to 4 video/audio entry modules distributed in two different call groups with intercom function and secrecy of speech.

The entry panel can provide one or two call groups without any mechanical modification.



The video entry module is composed of surface mounting B/W 4" monitor with receiver including the following push buttons and regulations:

| | |
|--|---|
|  Doorlock release |  Brightness |
|  Entry panel connection |  Contrast |
|  Intercom/Auxiliary push-button |  Call volume |

210mm
58mm
195,5mm



The power supply unit provides direct current and is electronically protected against short circuit and electric overloads. It provides power to the entry modules directly from the bus with a single twisted pair. An additional 24V DC-100mA output can control eventual auxiliary functions.

4 DIN modules

85mm
45mm
70mm

2 w

Video KIT *plus*




The surface mounted entry panel is equipped with only one push-button allowing one or two calls, according to the system configuration.



ADJUSTABLE CAMERA

The camera viewing angle can be easily adjusted ($\pm 14^\circ$ both horizontally and vertically)



LED LIGHTING

The call-button is backlit with a green LED. An audio signal confirms receipt of the call.



SINGLE-FAMILY SYSTEM




SEMI-DETACHED SYSTEM



wire video entry control


2 WIRES
UNPOLARIZED

▶▶ POWER SUPPLY

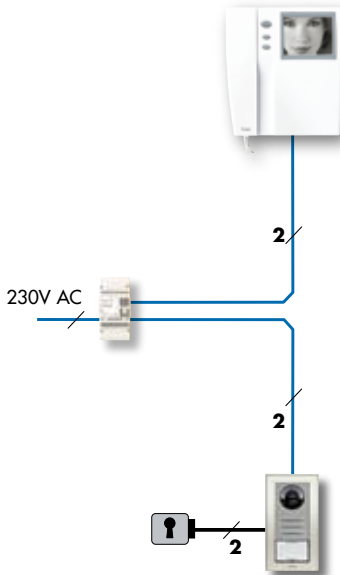

MAX
4

▶▶ EXPANDABILITY AND INTERCOMMUNICATION

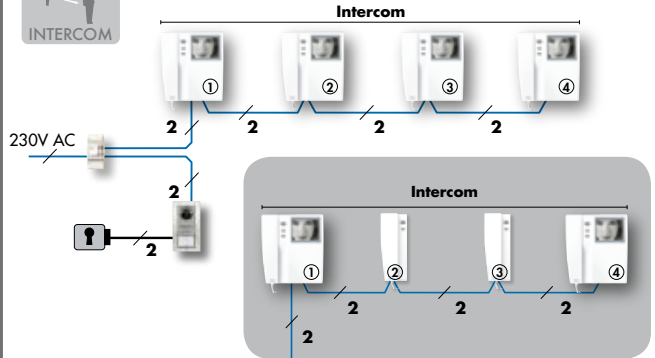

VIDEO KIT




ADDITIONAL
INTERNAL
EXTENSIONS



▶▶ VIDEO ENTRY KIT FOR ONE-WAY AND TWO WAYS SYSTEMS



The kit is set up for intercommunication between internal extensions **without additional wiring or accessories**, and the intercommunication in both single-family systems as well as semi-detached systems **always guarantees conversation confidentiality between the internal extensions.**

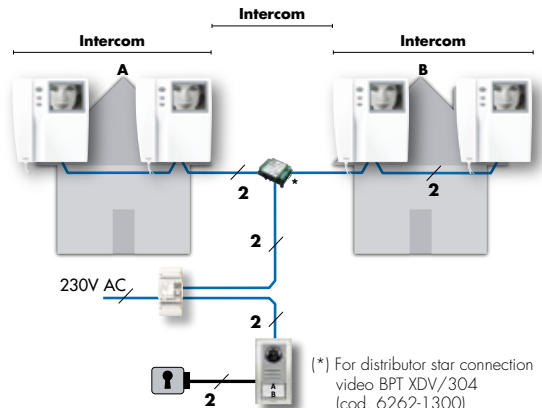

(*) For distributor star connection
video BPT XDV/304
(cod. 6262-1300)

KIT